

STANDARD VALVE VAULT

DUPLEX - 4" FORCE MAIN

NOTE: VALVES AND PIPING SYSTEM,
FACTORY TESTED TO 100 PSI.
AFTER ASSEMBLY.


PRE-CAST VALVE VAULT
WITH EASY ACCESS
FLYGT HATCH.

12" THICK
CAST-IN-PLACE CONCRETE
THRUST RESTRAINT COLLAR
(TYP. EACH END, BY OTHERS)

FORCE MAIN
(BY OTHERS)

SLEEVE COUPLING,
(D) VAULT PIPING TO
FORCE MAIN PIPING.
(BY OTHERS)

SLEEVE COUPLING,
BURIED DISCHARGE PIPING
TO (D) VAULT PIPING.
(TYP. OF 2 BY OTHERS IF REQ.)

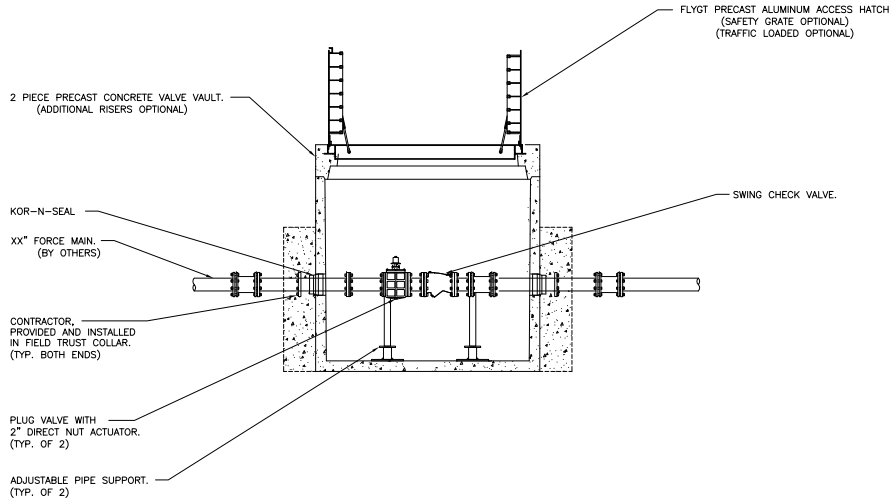

NO.	DATE	DESCRIPTION	BY
1			

DATE NOV. 2007

VERIFY SCALE
S.A. & ONE END ON
DRAWING
IF NOT THE END OF
SCALE ACCORDINGLY

DRAWN BY
DATE

DATE NOV. 2007

ROMTEC UTILITIES
18240 NORTH BANK ROAD
ROSEBURG, OR 97470
(541)-496-9678
FAX (541)-496-0804

4" FORCE MAIN
VALVE VAULT
LIFT STATION OPTION

SHEET
1 OF 1
JOB NUMBER
RMTc_0000