


FLOAT, PRESSURE TRANSDUCER AND TEMPERATURE MONITOR CABLES ARE TO BE ROUTED UP THROUGH THIS SPOOL AND 2in TAPPED HOLE.

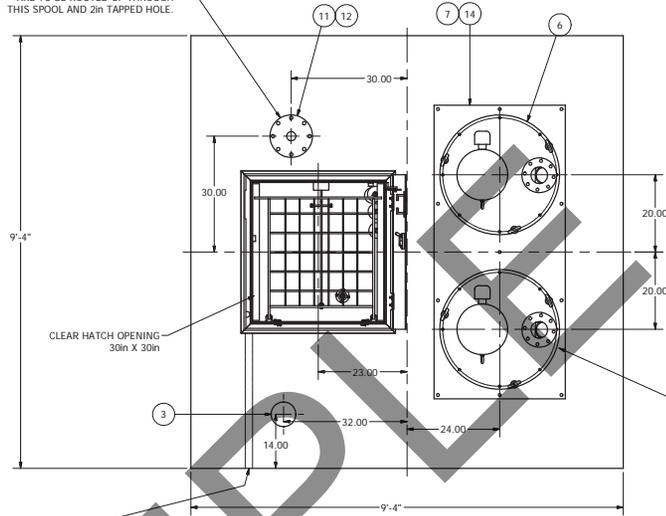

2 - 30"Ø HOLES IN CONCRETE TOP SLAB FOR PUMP REMOVAL AND INSTALLATION.

PUMP TAG NUMBERS:


1TR-P0003A
1TR-P0003B

NOTE: WET WELL TOP SLAB IS PEDESTRIAN RATED

NOTE:
CONDUIT TO CONTROL PANEL (BY OTHERS)
MINIMUM:
(2) FOR POWER
(1) FOR LEVEL SENSING

FLOAT, PRESSURE TRANSDUCER AND TEMPERATURE MONITOR CABLES ARE TO BE ROUTED UP THROUGH THIS SPOOL AND 2in TAPPED HOLE.

TWO 30"Ø PUMP HOLES IN THE CONCRETE TOP SLAB.

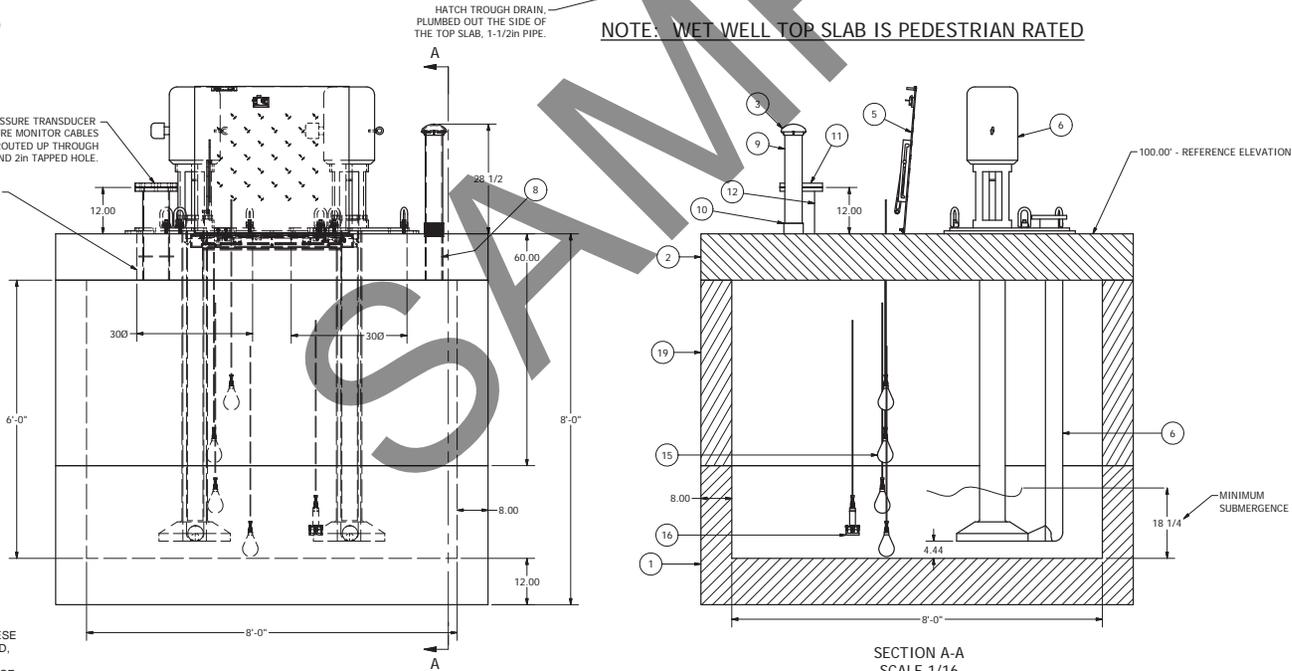

SECTION A-A
SCALE 1/16

NOTE: ALL DIMENSIONS AND ELEVATIONS SHOWN ARE NOMINAL DIMENSIONS. IT IS THE RESPONSIBILITY OF THE ON-SITE CONTRACTOR OR ROMTEC UTILITIES CUSTOMER (NOT ROMTEC UTILITIES) TO VERIFY THE ACCURACY OF ANY CRITICAL DIMENSIONS OR ELEVATIONS PRIOR TO SETTING OR INSTALLING ANY EQUIPMENT.

ALL MATERIALS SHOWN ON THIS SHEET WILL BE SUPPLIED BY ROMTEC UTILITIES AND DELIVERED TO THE SITE AFTER THE HOLE HAS BEEN EXCAVATED AND SHORED. THE CONTRACTOR SHALL SUPPLY A CRANE OF SUFFICIENT SIZE TO LOWER ALL THE CONCRETE PIECES INTO THE HOLE SAFELY. THE CONTRACTOR SHALL INSTALL THE WET WELL (AND VALVE VAULT AND METERING VAULT IF APPLICABLE). ROMTEC UTILITIES WILL PROVIDE A REPRESENTATIVE FOR TECHNICAL ASSISTANCE ON THE DAY OF INSTALLATION TO ANSWER ANY QUESTIONS THAT MAY ARISE. THE CONTRACTOR IS RESPONSIBLE FOR ALL PLUMBING AND ELECTRICAL CONNECTIONS AND INSTALLATION. ITEMS NOTED AS "BY OTHERS" WILL BE PROVIDED AND INSTALLED BY THE CONTRACTOR. ROMTEC UTILITIES WILL NOT INSTALL ANY OF THE COMPONENTS SHOWN ON THIS PAGE.

© 2016 ROMTEC INC. ALL RIGHTS RESERVED. THESE PLANS AND DRAWINGS MAY NOT BE REPRODUCED, ADAPTED, OR FURTHER DISTRIBUTED, AND NO COMPONENTS MAY BE CONSTRUCTED FROM THESE PLANS, WITHOUT WRITTEN PERMISSION OF ROMTEC, INC.

REV	DATE	APPROV	DESCRIPTION
2	8-4-16	AD	REVISED PUMP HOLE TO 30in DIAMETER
1		AD	ADDED DESCRIPTION
0		AD	ISSUE FOR REVIEW

COMPONENT DRAWING

ROMTEC UTILITIES
18240 NORTH BANK ROAD
ROSEBURG, OREGON 97170
(541) 496-9678
FAX (541) 496-0804

GENERA POWER
KINGS MOUNTAIN - HRSG
8ft X 8ft - SUMP PUMP

SHEET
1 OF 1

JOB NUMBER
RMTC