

PROJECT INFO

Job Name:	PORTLAND MEADOWS SITE A
Company:	
Contact:	
Job Type:	New Station
Water Type/Source:	Stormwater
Import/Domestic:	Import Acceptable



PACKAGE/STARTUP

Offering:	Complete System
Mechanical:	All by Romtec Utilities
Pumps:	By Romtec Utilities
Control Panel:	By Romtec Utilities
Generator:	By Romtec Utilities
Advisor/Startup:	Mechanical & Electrical
Turnkey:	No

DESIGN CRITERIA

FLOW RATE

Peak Inflow:	4500	GPM
Pumping Rate:	2250	GPM (of single pump)
Static Head:	15.8	Feet
TDH:	19.1	Feet
TDH Calcs:	RU Calcs	

ACTIVE VOLUME

Max Pump Starts:	20.00	Starts/Hr
Cycle Time:	3.00	Minutes
Active Volume:	1687.50	Gallons
Active Volume:	225.60	Cu Feet
Well Shape:	Round	
Well Diameter:	10	Feet
Well Dimensions:	N/A	N/A
Cross-Section Area:	78.54	Sq Feet
Min. Depth Required:	2.87	Feet
Active Depth:	3.00	Feet

STORAGE VOLUME (if required)

Time:		Minutes
Flow Rate:		GPM
Volume:	0.00	Gallons
Volume:	0.00	Cu. Feet
Min. Depth Required:	0.00	Feet
Storage Depth:		Feet

ON-SITE POWER


Power:	480V / 3-Phase
--------	----------------

FORCE MAIN

FM Info:	New	
Length:	13	Feet
FM Discharge:	9.26	Feet
FM High Point:	9.26	Feet
	(1)	(2) (3)
Nominal ID:	12"	
Type/Rating:	Ductile iron	

INFLUENT PIPING

Influent Invert:	-0.32		
Influent Size:	24"		
Type:			

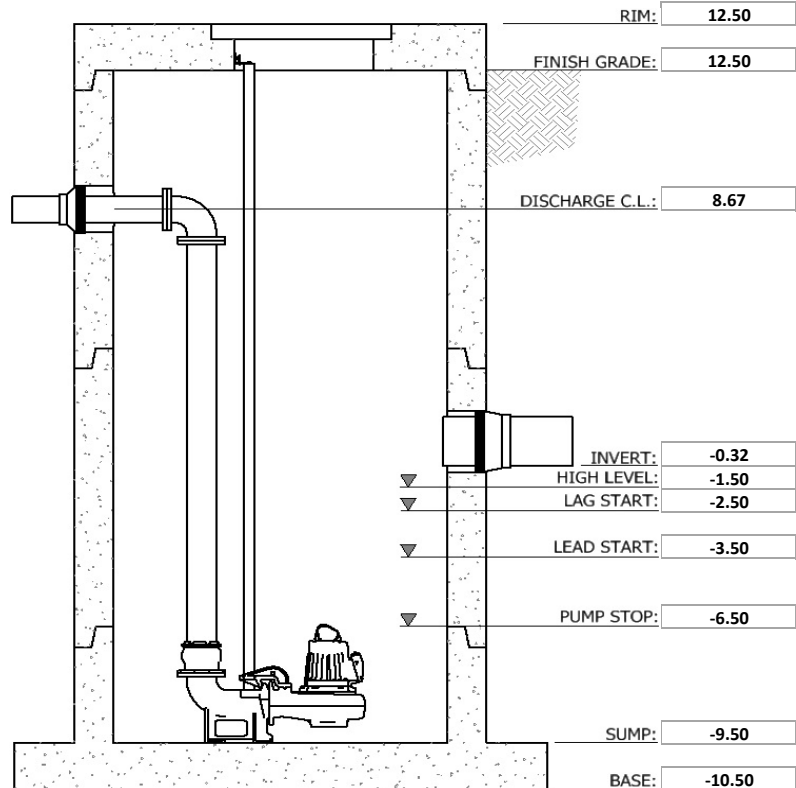

Note: Image is a preliminary representation of the pumping system. Elevations shown are the primary factors used for sizing the wet well. Backup levels not shown. Additional (or fewer) level settings may be required.