
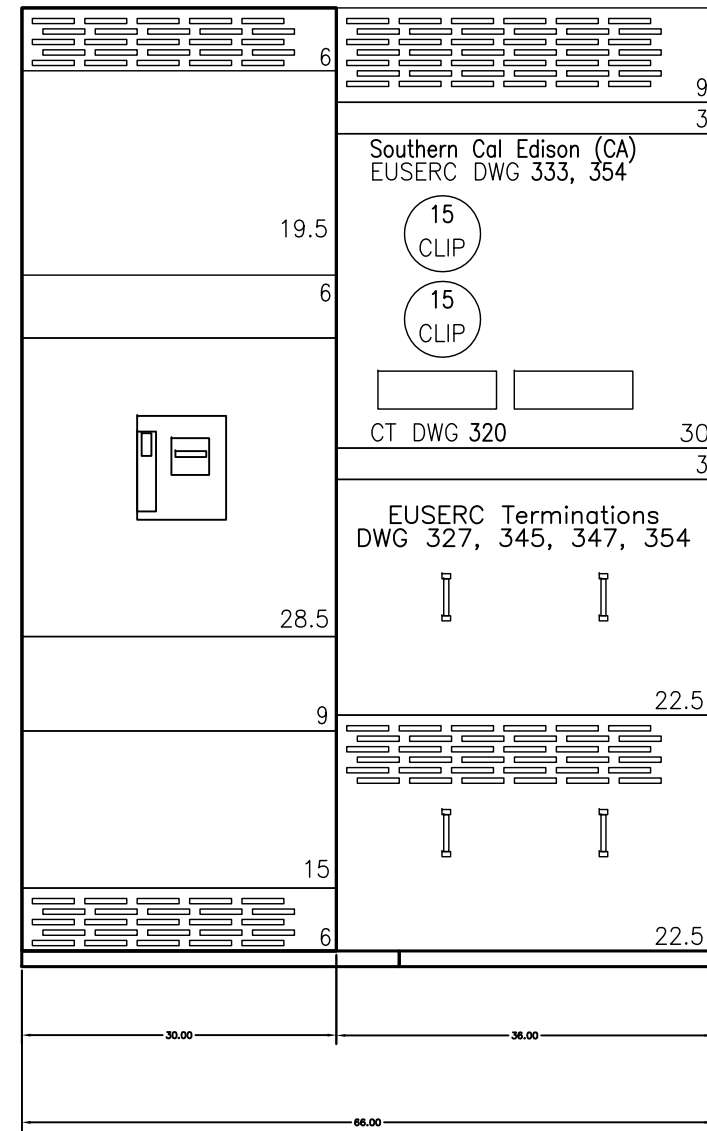


MOTOR CONTROL SECTION

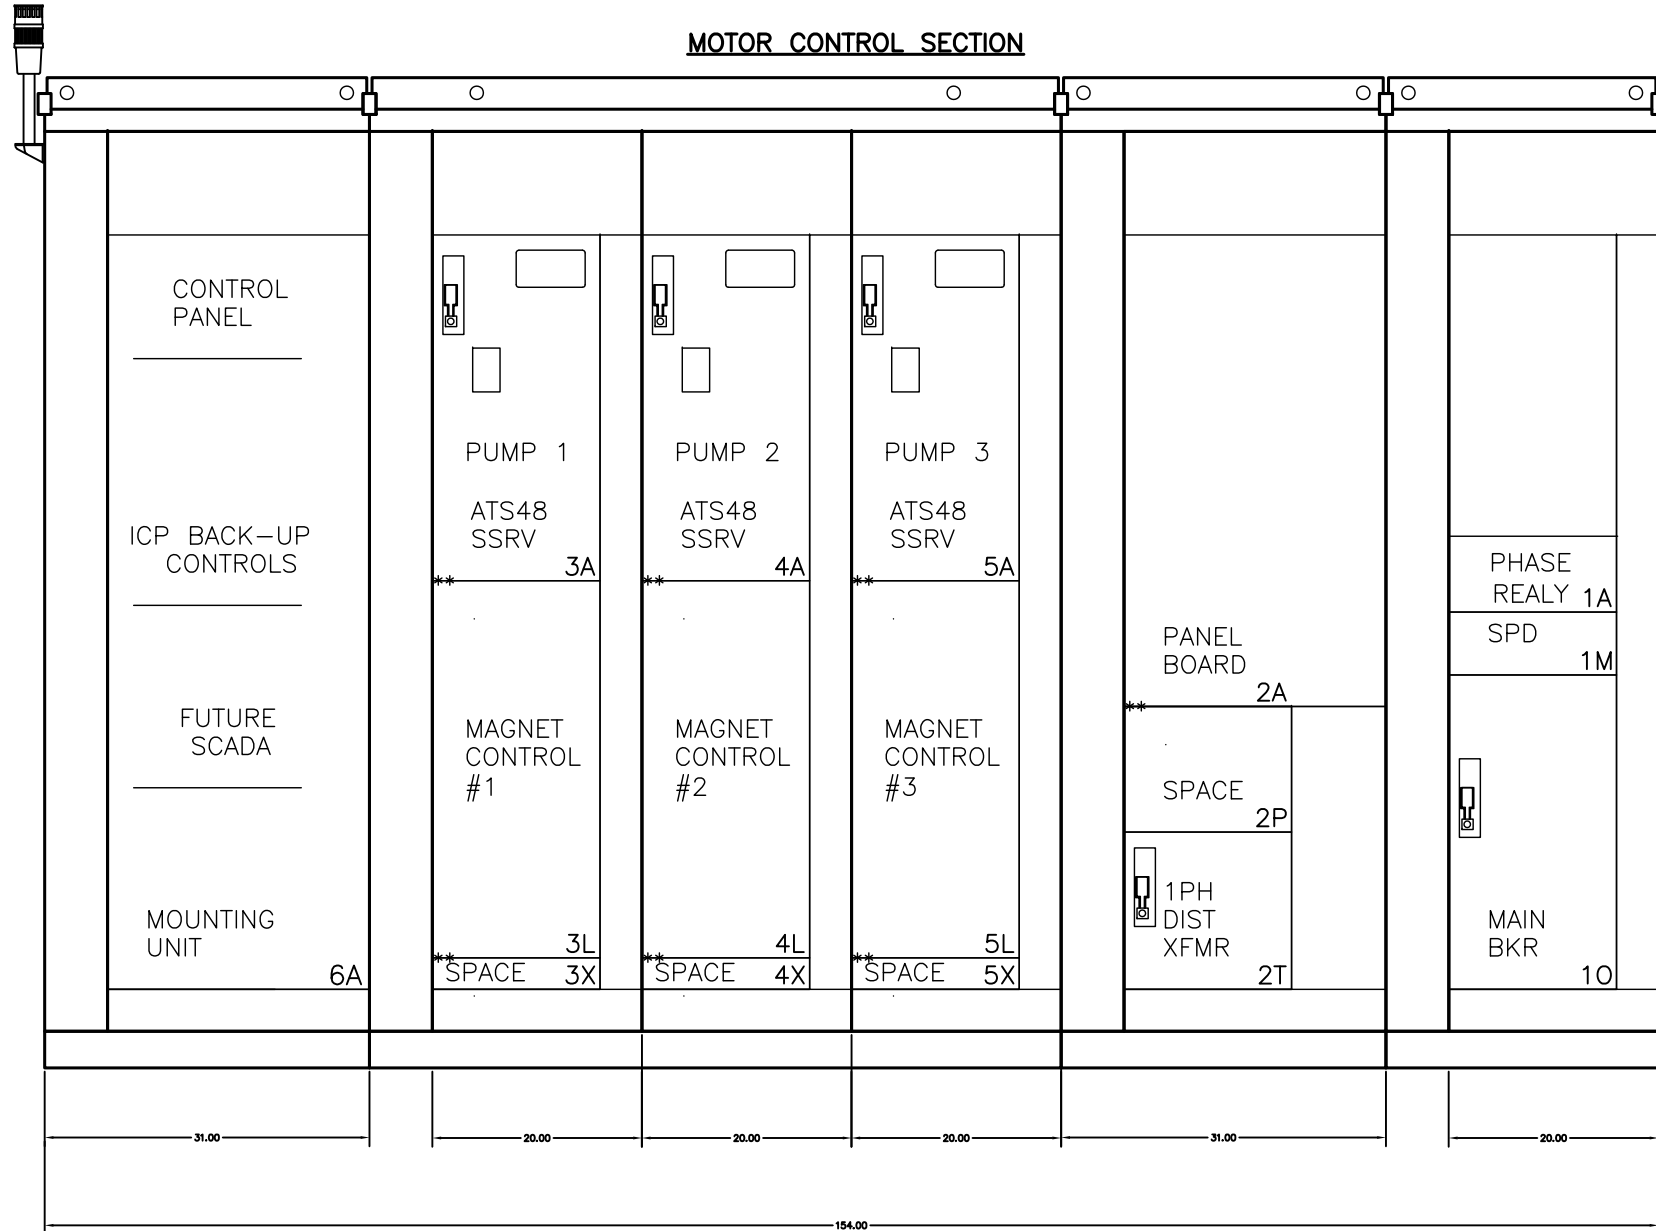

**SWITCHBOARD GENERAL NOTES
PRODUCT DESCRIPTION & RATINGS**

Power System Data

208Y/120V 3Ph 4W 60Hz / 3 Phase Wye
Solidly Grounded
System Short Circuit Current Rating: 85kA RMS
Incoming Section 1 Cable Through the Bottom Left of Lineup

Bus System Data

600A Copper Main Bus
(2) .25x2.00 IN/6x51 mm CU Bus Bar Per Phase/Neutral
(1) .25x1.50 IN/6x38 mm CU Ground Bus

Enclosure Data

Type 3R Free Standing
Exterior Paint Color: ANSI 49
Front Accessibility Only Required
Handling: Rollers
Rodent barriers
1.5H Corrosion Resist Base Channels
Base channels cannot be removed from EUSERC switchboard
Utility sealing hardware installed for unmetered bus compartments

Estimated Shipping Weight

Shipping Split 1 1387.00 lbs / 629.14 kgs
Complete Lineup 1387.00 lbs / 629.14 kgs

Code Standards

U.L. Deadfront

Rating Nameplates

ST1- Deadfront- Section Bus 600A
ST2- Deadfront- Section Bus 600A

PRODUCT INFORMATION

Wiring

All wiring to be Machine Tool Wire type

Instruction Bulletins

Reference 80043-055 For Handling, Installation, Anchoring, Inspection And Maintenance Information

Product Accessories/Options